



## Datolink Ltd

0811, Rujun Building, AV. Banxuegang, Bantian, Longgang district, Shenzhen, China 518129

Tel: 86-755-25263582 25263585 Fax: 86-755-28367056

Website: [www.datocom.com](http://www.datocom.com)

# 产 品 规 格 书

## *Product Specification Sheet*

### DTS8512L-C(D)S5

RoHS Compliant 1.25Gbps 850nm 550M Multimode SFP Optical Transceiver



---

## Product Features

- Transceiver unit with independent
- VCSEL laser transmitter and PIN photo-detector
- Up to 1.25Gbps data rate operation
- Up to 550M transmission distance at 1.25Gbps
- Standard serial ID information compliant with SFP MSA
- SFP MSA package with duplex LC connector
- Digital Diagnostic Monitor Interface
- Very low EMI and excellent ESD protection
- +3.3V single power supply
- RoHS compliant
- Case operating temperature
  - Commercial: 0°C to +70°C
  - Extended: -10°C to +80°C
  - Industrial: -40°C to +85°C

## Applications

- Switch/Router
- SAN/Server
- Other optical transmission systems


## Standard

- SFP MSA (Version Sept.14 2000) compliant
- SFF-8472 (Rev 9.3, Aug. 2002) Digital Diagnostic Monitoring Interface for Optical Transceivers compliant
- IEEE 802.3z compliant
- ANSI specifications for Fiber Channel compliant
- Telcordia GR-468-CORE compliant

## Description

Datacom 1.25Gbps 850nm 550M optical transceivers is designed for GE/1 x FC optical interface for data communications with multi mode fiber (MMF). It operates at 1.25Gbps for GE. The transceiver design is optimized for high performance and cost effective to supply customers the best solutions for datacom applications.

## Functional Diagram

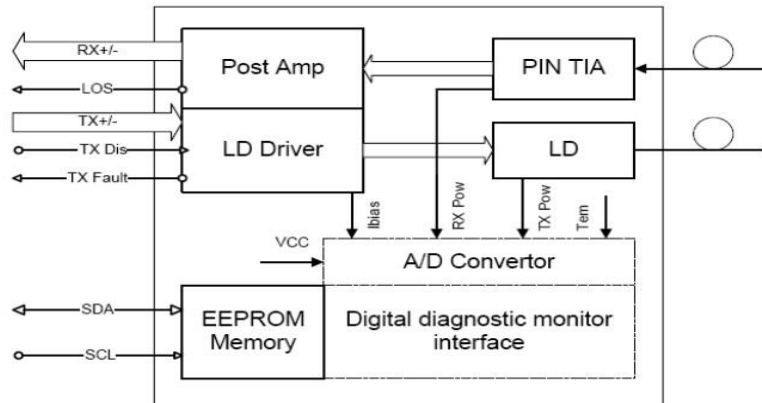

## Ordering information

Product part Number	Data Rate (Mbps)	Media	Wavelength (nm)	Transmission Distance(km)	Temperature Range ( Tcase ) ( °C )	
DTS8512L-C(D)02	1250	Multi mode	850	<2	0~70	commercial
DTS8512L-E(D)02	1250	Multi mode	850	<2	-10~80	extended
DTS8512L-I(D)02	1250	Multi mode	850	<2	-45~85	industrial

## Absolute Maximum Ratings

Parameter	Symbol	Min.	Max	Unit	Notes
Supply Voltage	Vcc	-0.5	3.60	V	
Storage Temperature		-40	85	°C	
Relative Humidity		5	95	%	

Note: Stress in excess of the maximum absolute ratings can cause permanent damage to the module.

## General Operating Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Data Rate	Gigabit Ethernet			1.25		Gb/s	
	Fiber Channel			1.0625			
Supply Voltage		Vcc	3.1	3.3	3.5	V	
Supply Current		Icc			270	mA	
Operating Case Temperature		Tc	0		70	°C	
			-10		80		
			-45		85		

## Electrical Input/Output Characteristics

### ● Transmitter

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Diff. Input Voltage Swing		300		1600	mVpp	1
Tx Disable Input	H	$V_{IH}$	2.0	$V_{CC}+0.3$	V	
	L	$V_{IL}$	0	0.8		
Tx Fault Output	H	$V_{OH}$	2.0	$V_{CC}+0.3$	V	2
	L	$V_{OL}$	0	0.5		
Input Diff. Impedance	$Z_{in}$		100		$\Omega$	

### ● Receiver

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Diff. Output Voltage Swing		400		1000	mVpp	3
Rx LOS Output	H	$V_{OH}$	2.0	$V_{CC}+0.3$	V	2
	L	$V_{OL}$	0	0.8		

Note 1) TD+/- are internally AC coupled with 100 $\Omega$  differential termination inside the module.

Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10k $\Omega$  resistors on the host board. Pull up voltage between 2.0V and  $V_{CC}+0.3V$ .

Note 3) RD+/- outputs are internally AC coupled, and should be terminated with 100 $\Omega$  (differential) at the user SERDES.

## Optical Characteristics

### ● Transmitter

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Ave. Output Power (Enable)	$P_o$	-9		-3	dBm	1
Total Jitter	1.25G			0.431	UI	
Extinction Ratio	ER	9			dB	1
Rise/Fall Time (20%-80%)	Tr-Tf			0.26	ns	2
Wavelength Range		840	850	860	nm	
Spectral Width (RMS)				0.65	nm	
Output Optical Eye	Compliant with IEEE802.3 z (class 1 laser safety)					

### ● Receiver

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Operating Wavelength		770		860	nm	
Sensitivity	$P_{imin}$			-20	dBm	3
Min. Overload	$P_{imax}$	0			dBm	3
Total Jitter	1.25G			0.749	UI	


LOS Assert	Pa	-33			dBm	
LOS De-assert	Pd			-23	dBm	
LOS Hysteresis	Pd-Pa	0.5		6	dB	

Note 1) Measured at 1250 Mb/s with PRBS  $2^7 - 1$  NRZ test pattern.

Note 2) Unfiltered, measured with a PRBS  $2^7 - 1$  test pattern @1.25Gbps

Note 3) Measured at 1250 Mb/s with PRBS  $2^7 - 1$  NRZ test pattern for BER <  $1 \times 10^{-12}$

## Pin Definitions and Functions

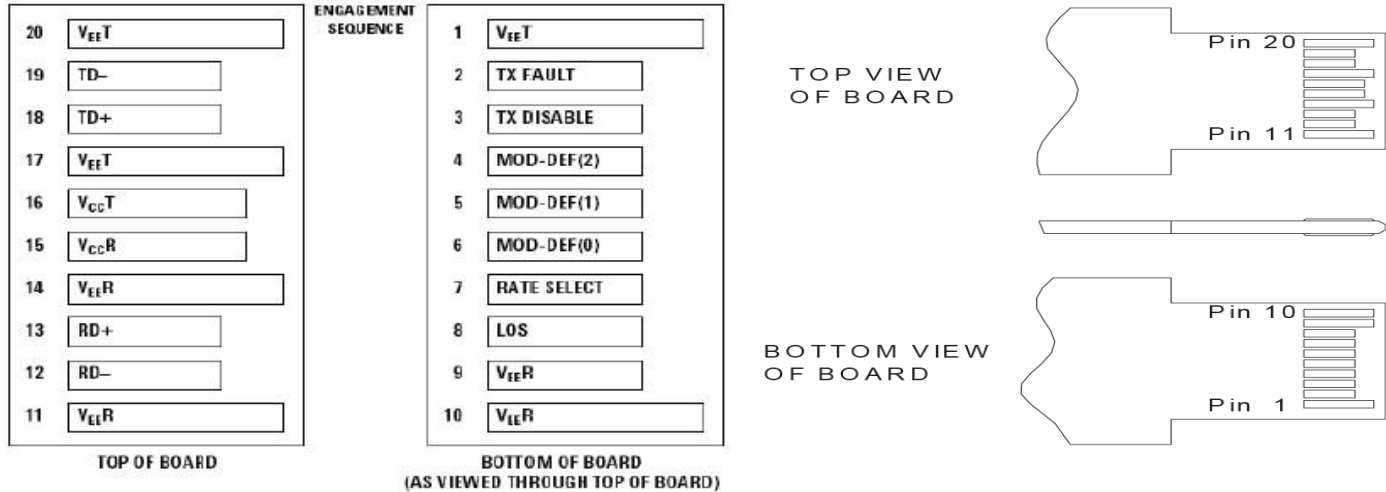

PIN #	Name	Function	Notes
1	VeeT	Tx ground	
2	Tx Fault	Tx fault indication, Open Collector Output, active "H"	Note 1
3	Tx Disable	LVTTTL Input, internal pull-up, Tx disabled on "H"	Note 2
4	MOD-DEF2	2 wire serial interface data input/output (SDA)	Note 3
5	MOD-DEF1	2 wire serial interface clock input (SCL)	Note 3
6	MOD-DEF0	Model present indication	Note 3
7	Rate select	No connection	
8	LOS	Rx loss of signal, Open Collector Output, active "H"	Note 4
9	VeeR	Rx ground	
10	VeeR	Rx ground	
11	VeeR	Rx ground	
12	RD-	Inverse received data out	Note 5
13	RD+	Received data out	Note 5
14	VeeR	Rx ground	
15	VccR	Rx power supply	
16	VccT	Tx power supply	
17	VeeT	Tx ground	
18	TD+	Transmit data in	Note 6
19	TD-	Inverse transmit data in	Note 6
20	VeeT	Tx ground	

Note 1) When high, this output indicates a laser fault of some kind. Low indicates normal operation. And should be pulled up with a 4.7 – 10K $\Omega$  resistor on the host board.

Note 2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10K $\Omega$  resistor. Its states are:

Low (0 – 0.8V): Transmitter on ( $>0.8$ ,  $< 2.0$ V): Undefined  
High (2.0V~Vcc+0.3V): Transmitter Disabled Open: Transmitter Disabled

Note 3) Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10K $\Omega$  resistor on the host board. The pull-up voltage shall be between 2.0V~Vcc+0.3V.

Mod-Def 0 has been grounded by the module to indicate that the module is present

Mod-Def 1 is the clock line of two wire serial interface for serial ID


Mod-Def 2 is the data line of two wire serial interface for serial ID

Note 4) When high, this output indicates loss of signal (LOS). Low indicates normal operation.


Note 5) RD+/-: These are the differential receiver outputs. They are AC coupled 100 $\Omega$  differential lines which should be terminated with 100 $\Omega$  (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.

Note 6) TD+/-: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100 $\Omega$  differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.

## Typical Interface Circuit

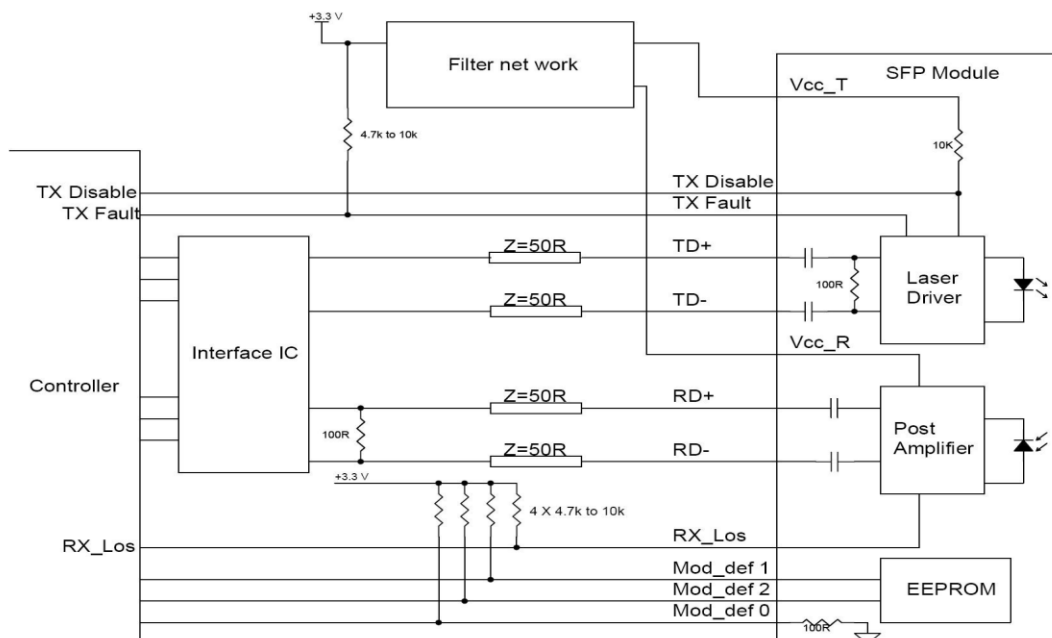



## Recommended power supply filter

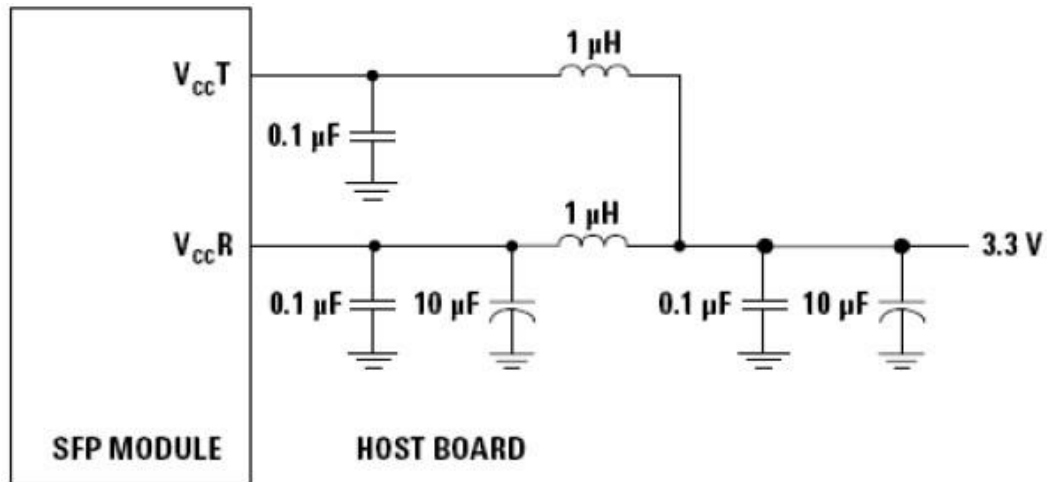

*Note: Inductors with DC resistance of less than  $1\ \Omega$  should be used in order to maintain the required voltage at the SFP input pin with 3.3V supply voltage. When the recommended supply filtering network is used, hot plugging of the SFP transceiver module will result in an inrush current of no more than 30 mA greater than the steady state value.*

## Package Dimensions

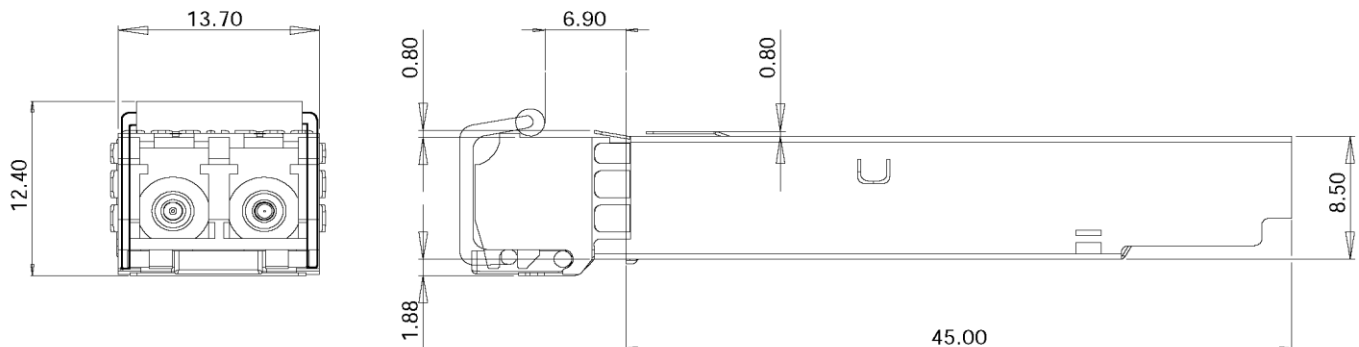

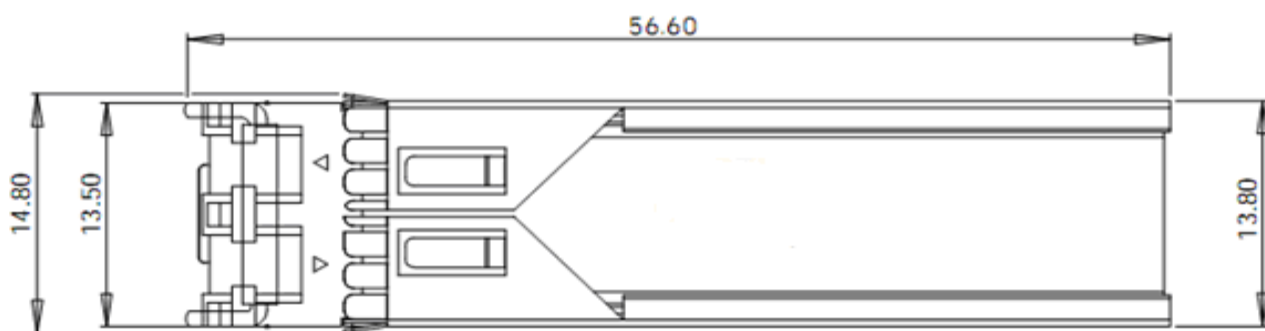

## Ordering Information & Related Products

DTS8512L-CNS5	Dual Fiber SFP, 1.25Gbps, 850nm, 550M, without DDM
DTS8512L-CDS5	Dual Fiber SFP, 1.25Gbps, 850nm, 550M, with DDM

## FOR MORE INFORMATION

DATOLINK Ltd

**Add:** 0811,Rujun Building, AV.Banxuegang, Bantian,  
Longgang District,Shenzhen,China 518129

**Tel:** 86-755-25263582 25263585

**Fax:**86-755-28367056

**Email:** sales@datolink.com

Website:[www.datocom.com](http://www.datocom.com)