



Datolink Ltd

0811, Rujun Building, AV. Banxuegang, Bantian, Longgang district, Shenzhen, China 518129

Tel: 86-755-25263582 25263585 Fax: 86-755-28367056

Website: www.datocom.com

产 品 规 格 书

Product Specification Sheet

DTS3112L-C(D)20

RoHS Compliant 1.25Gbps 1310nm 20KM Singlemode Datacom SFP Optical Transceiver



Product Features

- Transceiver unit with independent
- FP laser transmitter and PIN photo-detector
- Dual Data-rate of 1.25Gbps/1.0625Gbps Operation
- Up to 20KM transmission distance on 9/125μm SMF
- Standard serial ID information compliant with SFP MSA
- SFP MSA package with duplex LC connector
- Digital Diagnostic Monitor Interface
- Very low EMI and excellent ESD protection
- +3.3V single power supply
- Wide operating temperature range
- RoHS compliant
- Case operating temperature
 - Commercial: 0°C to +70°C
 - Extended: -10°C to +80°C
 - Industrial: -40°C to +85°C

Applications

- Switch/Router
- SAN/Server
- Other optical transmission systems


Standard

- SFP MSA (Version Sept.14 2000) compliant
- SFF-8472 (Rev 9.3, Aug. 2002) Digital Diagnostic Monitoring Interface for Optical Transceivers compliant
- IEEE 802.3z compliant
- ANSI specifications for Fiber Channel compliant
- Telcordia GR-468-CORE compliant

Description

Datocom 1 **DTS3112L-C(D)20** optical transceivers are designed for GE/1 x FC optical interface for data communications with single mode fiber (SMF), and multimode fiber (MMF) as well. They operate at both 1.25Gbps for GE and 1.0625Gbps for 1xFC. The transceiver designs are optimized for high performance and cost effective to supply customers the best solutions for datacom applications.

Functional Diagram

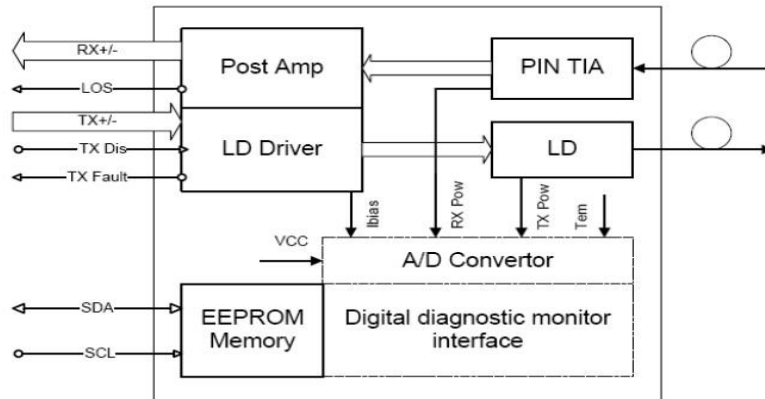

Ordering information

Product part Number	Data Rate (Mbps)	Media	Wavelength (nm)	Transmission Distance(km)	Temperature Range (Tcase) (°C)	
DTS3112L-C(D)20	1250	Single mode fiber	1310	20	0~70	commercial
DTS3112L-E(D)20	1250	Single mode fiber	1310	20	-10~80	extended
DTS3112L-I(D)20	1250	Single mode fiber	1310	20	-45~85	industrial

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max	Unit	Notes
Supply Voltage	Vcc	-0.5	3.60	V	
Storage Temperature		-40	85	°C	
Relative Humidity		5	95	%	

Note: Stress in excess of the maximum absolute ratings can cause permanent damage to the module.

General Operating Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Data Rate	Gigabit Ethernet			1.25		Gb/s	
	Fiber Channel			1.0625			
Supply Voltage		Vcc	3.1	3.3	3.5	V	
Supply Current		Icc			270	mA	
Operating Case Temperature		Tc	0		70	°C	
			-10		80		
			-45		85		

Electrical Input/Output Characteristics

● Transmitter

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Diff. Input Voltage Swing			300		1800	mVpp	1
Tx Disable Input	H	V_{IH}	2.0		$V_{CC}+0.3$	V	
	L	V_{IL}	0		0.8		
Tx Fault Output	H	V_{OH}	2.0		$V_{CC}+0.3$	V	2
	L	V_{OL}	0		0.8		
Input Diff. Impedance		Z_{in}		100		Ω	

● Receiver

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Diff. Output Voltage Swing			400		1000	mVpp	3
Rx LOS Output	H	V_{OH}	2.0		$V_{CC}+0.3$	V	2
	L	V_{OL}	0		0.8		

Note 1) TD+/- are internally AC coupled with 100 Ω differential termination inside the module.

Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10k Ω resistors on the host board. Pull up voltage between 2.0V and $V_{CC}+0.3V$.

Note 3) RD+/- outputs are internally AC coupled, and should be terminated with 100 Ω (differential) at the user SERDES.

Optical Characteristics

● Transmitter

Parameter		Symbol	Min.	Type	Max.	Unit	Notes
Ave. Output Power (Enable)	10km	P_o	-8		-4	dBm	1
	20km						
Extinction Ratio		ER	9			dB	1
Rise/Fall Time (20%-80%)		Tr-Tf			0.26	ns	2
Wavelength Range			1270		1360	nm	
Spectral Width (RMS)					4	nm	
Output Optical Eye		Compliant with IEEE802.3 z (class 1 user safety)					

● Receiver

Parameter		Symbol	Min.	Type	Max.	Unit	Notes
Operating Wavelength			1270		1610	nm	
Sensitivity	10km	P_{imin}			-24	dBm	3
	20km						
Min. Overload		P_{imax}	-3			dBm	3
LOS Assert		P_a	-38			dBm	


LOS De-assert	Pd			-26	dBm	
LOS Hysteresis	Pd-Pa	0.5		6	dB	

Note 1) Measured at 1250 Mb/s with PRBS $2^7 - 1$ NRZ test pattern.

Note 2) Unfiltered, measured with a PRBS $2^7 - 1$ test pattern @1.25Gbps

Note 3) Measured at 1250 Mb/s with PRBS $2^7 - 1$ NRZ test pattern for BER < 1×10^{-12}

Pin Definitions and Functions

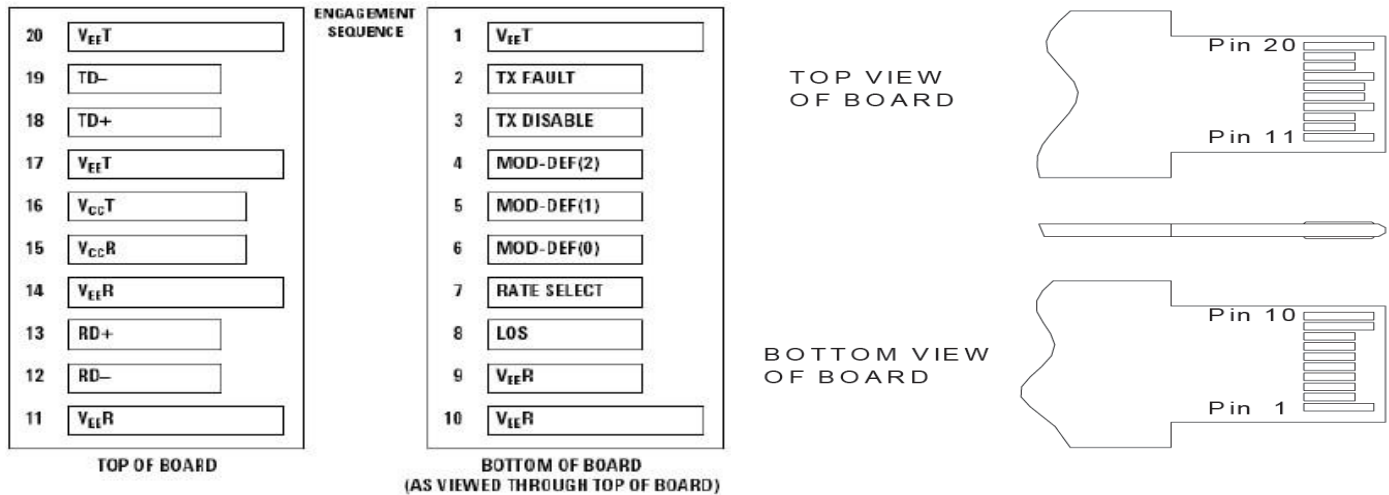

PIN #	Name	Function	Notes
1	VeeT	Tx ground	
2	Tx Fault	Tx fault indication, Open Collector Output, active "H"	Note 1
3	Tx Disable	LVTTL Input, internal pull-up, Tx disabled on "H"	Note 2
4	MOD-DEF2	2 wire serial interface data input/output (SDA)	Note 3
5	MOD-DEF1	2 wire serial interface clock input (SCL)	Note 3
6	MOD-DEF0	Model present indication	Note 3
7	Rate select	No connection	
8	LOS	Rx loss of signal, Open Collector Output, active "H"	Note 4
9	VeeR	Rx ground	
10	VeeR	Rx ground	
11	VeeR	Rx ground	
12	RD-	Inverse received data out	Note 5
13	RD+	Received data out	Note 5
14	VeeR	Rx ground	
15	VccR	Rx power supply	
16	VccT	Tx power supply	
17	VeeT	Tx ground	
18	TD+	Transmit data in	Note 6
19	TD-	Inverse transmit data in	Note 6
20	VeeT	Tx ground	

Note 1) When high, this output indicates a laser fault of some kind. Low indicates normal operation. And should be pulled up with a 4.7 – 10K Ω resistor on the host board.

Note 2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10K Ω resistor. Its states are:

Low (0 – 0.8V): Transmitter on (>0.8 , < 2.0 V): Undefined
High (2.0V~Vcc+0.3V): Transmitter Disabled Open: Transmitter Disabled

Note 3) Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10K Ω resistor on the host board. The pull-up voltage shall be between 2.0V~Vcc+0.3V.

Mod-Def 0 has been grounded by the module to indicate that the module is present

Mod-Def 1 is the clock line of two wire serial interface for serial ID


Mod-Def 2 is the data line of two wire serial interface for serial ID

Note 4) When high, this output indicates loss of signal (LOS). Low indicates normal operation.


Note 5) RD+/-: These are the differential receiver outputs. They are AC coupled 100 Ω differential lines which should be terminated with 100 Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.

Note 6) TD+/-: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100 Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.

Typical Interface Circuit

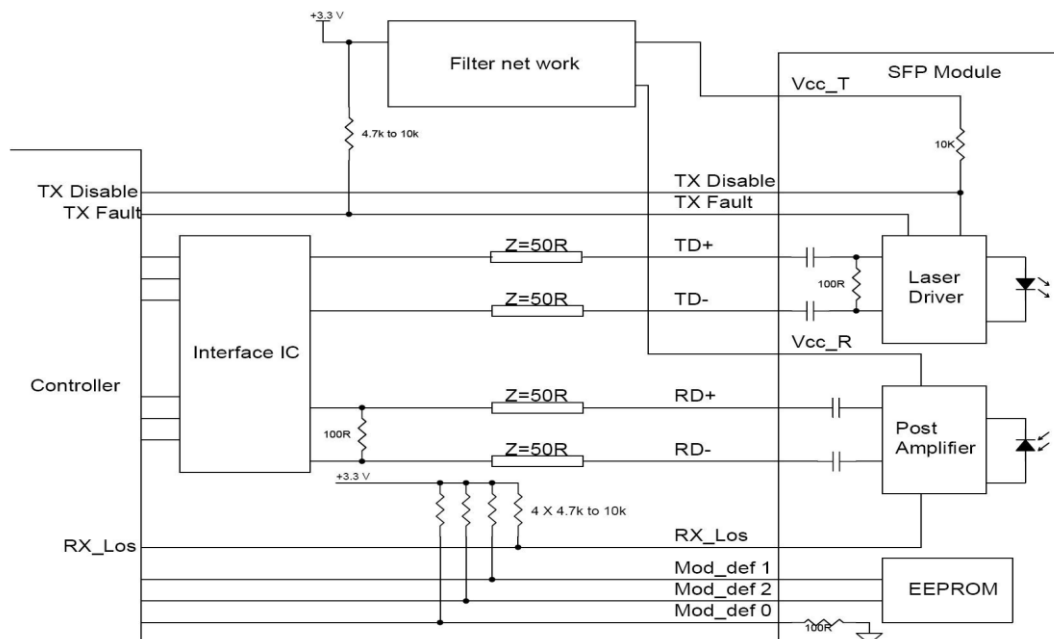



Recommended power supply filter

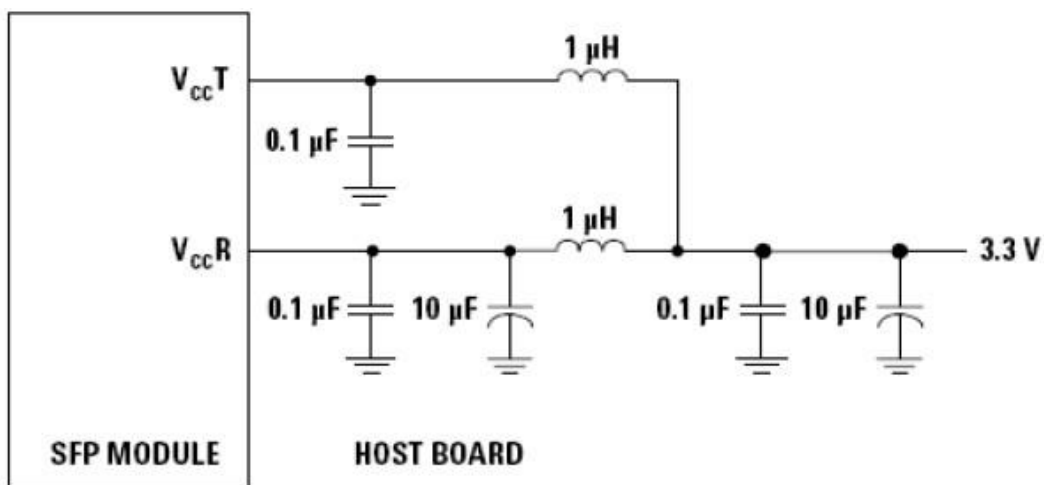

Note: Inductors with DC resistance of less than 1Ω should be used in order to maintain the required voltage at the SFP input pin with 3.3V supply voltage. When the recommended supply filtering network is used, hot plugging of the SFP transceiver module will result in an inrush current of no more than 30 mA greater than the steady state value.

Package Dimensions

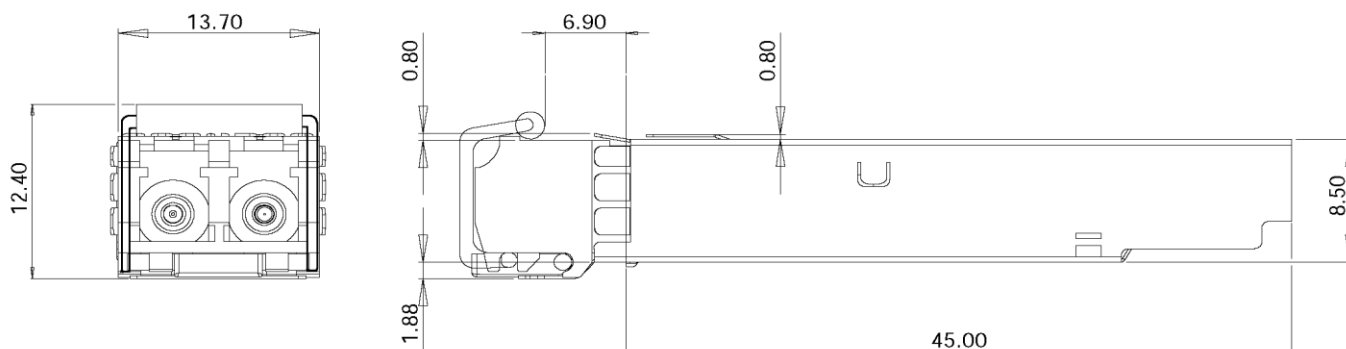

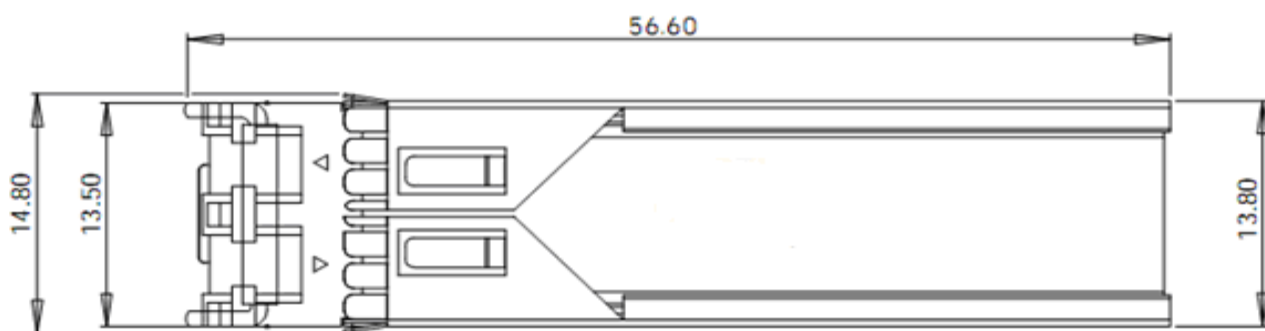

Ordering Information & Related Products

DTS3112L-CN20	Dual Fiber SFP, 1.25Gbps, 1310nm, 20KM, without DDM
DTS3112L-CD20	Dual Fiber SFP, 1.25Gbps, 1310nm, 20KM, with DDM

FOR MORE INFORMATION

DATOLINK Ltd

Add: 0811,Rujun Building, AV.Banxuegang, Bantian,
Longgang District,Shenzhen,China 518129

Tel: 86-755-25263582 25263585

Fax:86-755-28367056

Email: sales@datolink.com

Website:www.datocom.com